



PROTECT O'6 PIPE SUPPORT

World's Strongest & Economical Solution

FACING SEVERE CORROSION PROBLEM AT PIPE SUPPORT LOCATION ?

PROTECT YOUR PIPE SUPPORT LOCATION WITH **PROTECT O'6**®






BEFORE



AFTER

Technical Specification & Benefits:

- 2" wide x 1/2" thick x 12" long
- One size fits all diameters of pipe
- Eliminates crevice corrosion
- May be glued or nailed/screwed
- High load bearing capacity 17 T
- Extreme chemical resistance
- Crack resistant, reinforced engineered resin
- Patented shape provides for enhanced adhesive performance
- No lifting of pipe required for installation
- Needs 12mm gap for placement of Protect O'6
- Continuous operating temperature limit under load is 180 F (82°C)
- Hold's USA Patent
- No surface finish required
- No skilled labour required
- Can be used for present retrofit
- Removable and reusable pipe support
- Unlimited shelf life

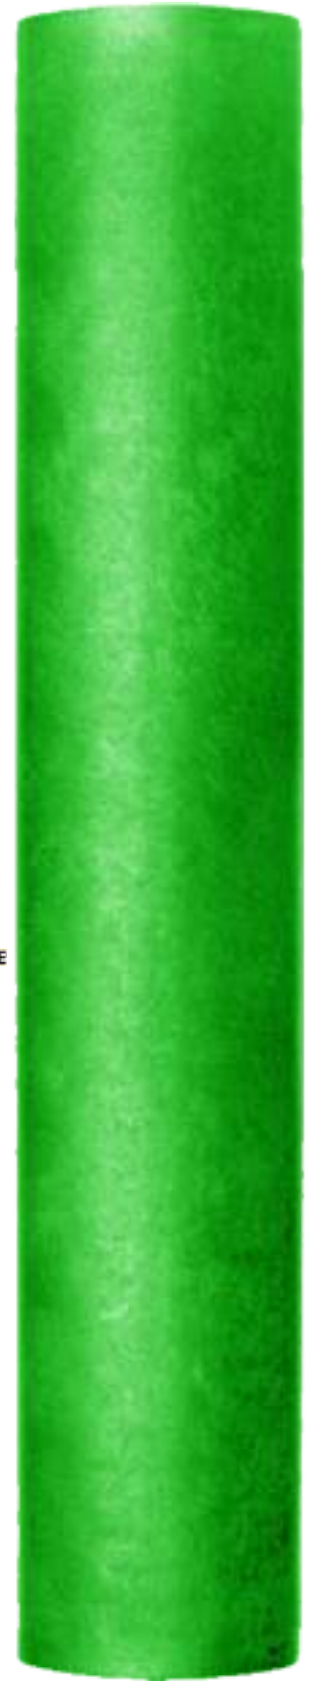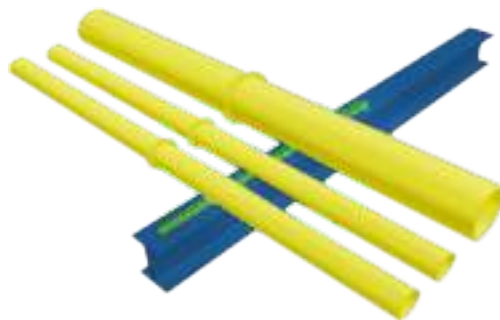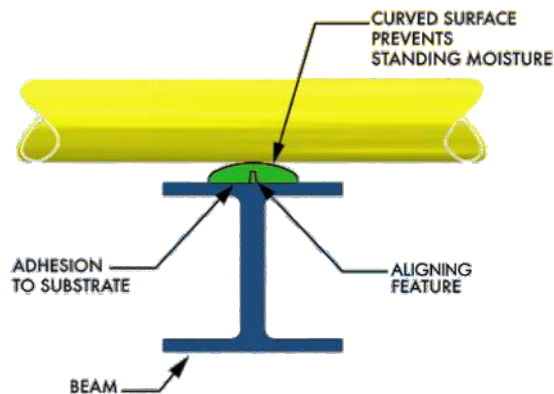

For more information contact:

info@ismindia.in
www.ismindia.in

CERTIFIED BY

